



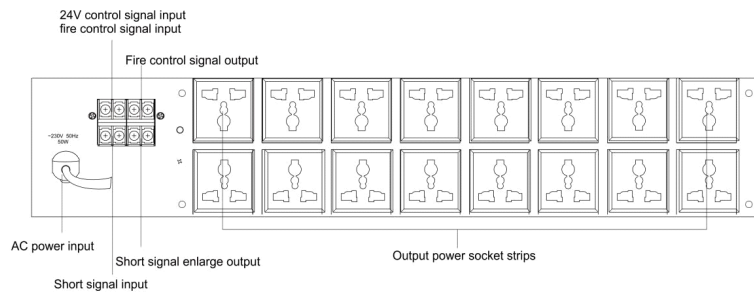

16-Channel Power Sequencer

T-6216

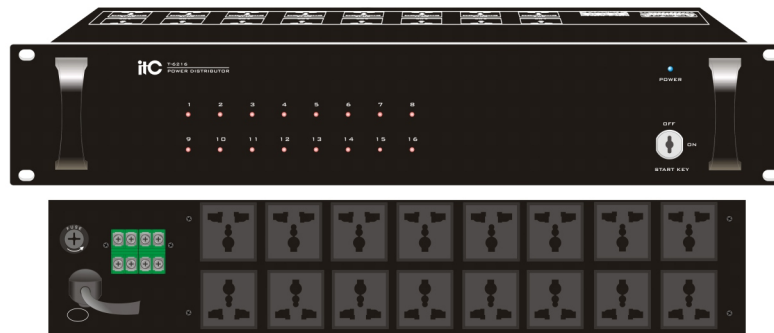

Features:

- * With standard chassis design and 2U aluminum alloy panel.
- * 16 power sockets connected or disconnected in turn. The time between the two way is 1S.
- * 1 input interface with 24V fire signal, 1 signal output triggered by fire short circuit emergency.
- * 16 channels of power output, each channel outputs AC 220 V (10 A), and the total capacity of power socket reaches 6000 W.
- * It is equipped with electronic lock switch, which can manually control the power-off of 16 power supplies; it can also be connected with timer and intelligent controller to realize automatic control; CH1 and CH2 channels can be configured in controlled or uncontrolled state.

Specifications:

Model	T-6216
Power Supply	~110V-230V 50/60Hz
Power Consumption	50W
Dimension	484 x 303 x 88mm
Weight	5.78Kg