




## Features

- \* Support 16 zones, group paging button.
- \* System max support 32 remote paging microphones.
- \* Microphone support anti-misoperation plug.
- \* Support line audio input, and input/output volume is adjustable.
- \* Paging priority can be set by software.
- \* Support 24 DC power supply.
- \* Remote MIC/Controller has 2 cascade interfaces, 1 in and 1 out.
- \* Optional paging to the main controller or extension controller.

## Specifications

<b>Model</b>	VA-6200RM
<b>MIC</b>	Capacitor Microphone
<b>MIC Sensitivity</b>	10mV/600Ω
<b>MIC Frequency Response</b>	200Hz~10KHz
<b>MIC SNR</b>	>65dB
<b>Line Input Sensitivity</b>	775mV/10KΩ
<b>Line Input Frequency Response</b>	80Hz~16KHz
<b>Line Input SNR</b>	>70dB
<b>Signal Output</b>	1V
<b>Distortion</b>	<1% (Rated output power), 1KHz
<b>Supply Voltage</b>	24V DC
<b>Dimension (L x W x D)</b>	256 x 52 x 149mm
<b>Net Weight</b>	1.3kg

## Back Panel

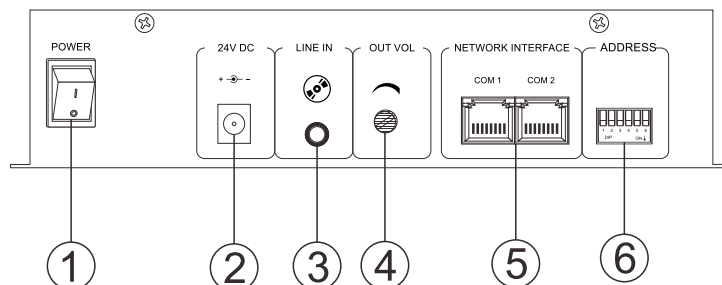

### Connectors

- ① Power switch
- ② DC voltage input
- ③ Line Sound source input
- ④ Output volume adjustment
- ⑤ CAN Communication network port
- ⑥ Dial code setting:(Upward: Use Down: Close)