


DESCRIPTION

The SR-F04 is a 2-way passive speaker system for indoor-use. Properly-designed built-in passive network provides high quality sound and high output capability. The speaker can be used for many applications as permanent and temporary installations.

SPECIFICATIONS

| | |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System Type | 2-way, Passive type, Bass-reflex type |
| Power Handling Capacity | Continuous pink noise: 80 W Continuous program: 240 W |
| Rated Impedance | 8 Ω |
| Sensitivity | 88 dB (1 W, 1 m) |
| Frequency Response | 80 Hz - 20 kHz |
| Crossover Frequency | 3 kHz |
| Directivity Angle | 70° Conical |
| Speaker Component | Low frequency: 10 cm (4") cone-type × 2 High frequency: Compression driver fitted with CD horn |
| Connector | Neutrik NL4MP × 2, M4 screw terminal, distance between barriers: 11 mm (0.43") |
| Finish | Enclosure: Birch plywood, black, polyurea coating Grille: Steel plate, black, 40 % gloss, paint |
| Dimensions | 165 (W) × 400 (H) × 177 (D) mm (6.5" × 15.75" × 6.97") |
| Weight | 5.8 kg (12.79 lb) |
| Option | Speaker mounting bracket: HY-B0801, HY-UH04, HY-UV04 Ceiling mount bracket: HY-C0801 Speaker wall mount bracket: HY-W0801, HY-WM04 Speaker stand adapter: HY-ST04 Speaker stand: ST-34B |

APPEARANCE

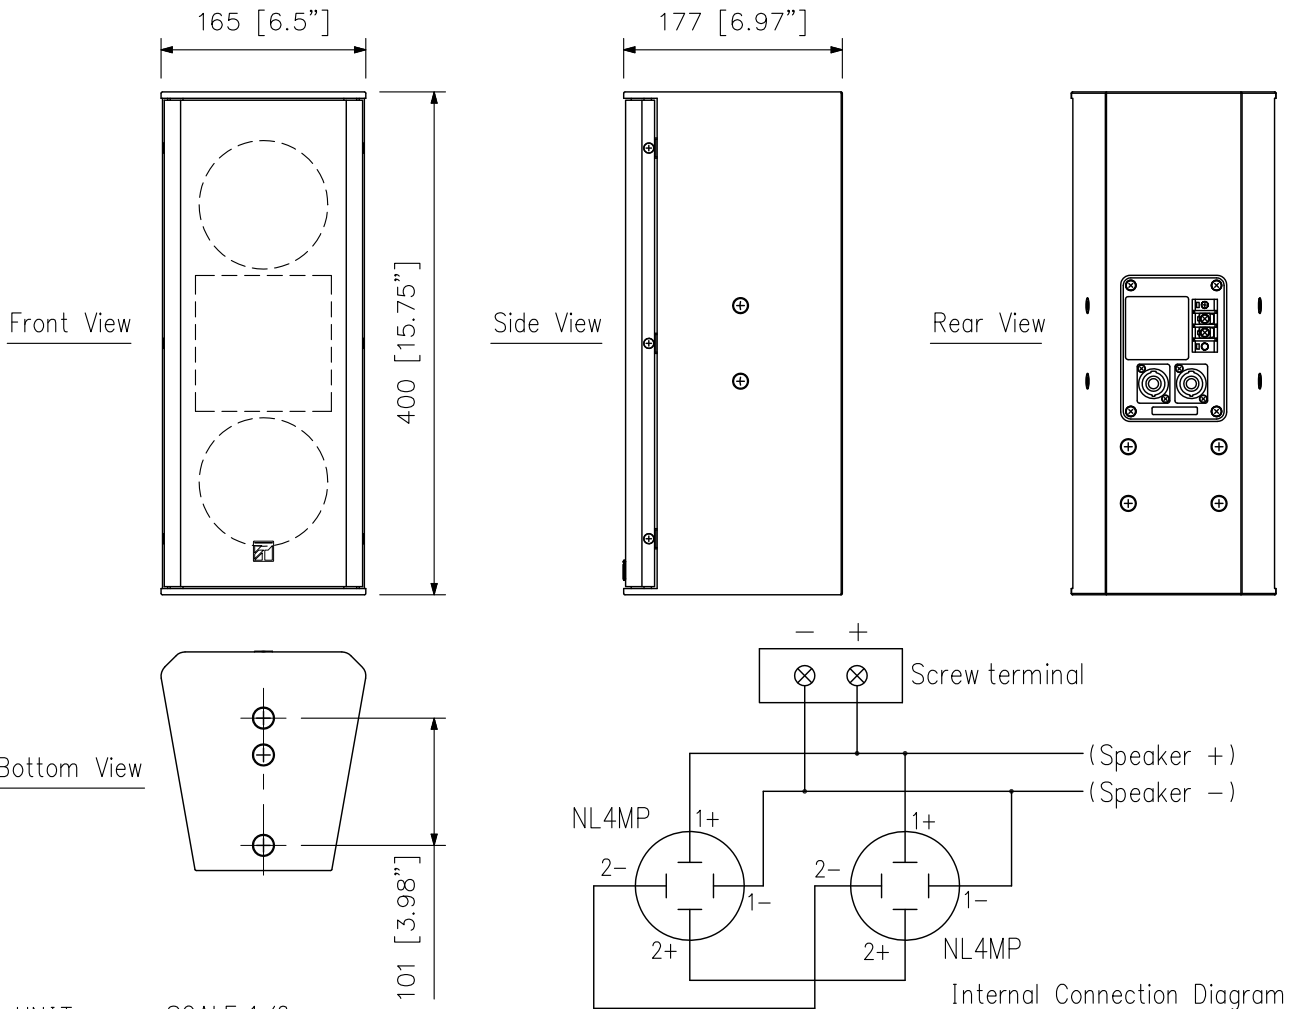

UNIT: mm SCALE: 1/6

Internal Connection Diagram